

DH Series

Regulators - Pressure Reducing

DDHXX1910X012

Specifications

For other materials or modifications, please consult TESCOM.

OPERATING PARAMETERS

Pressure rating per criteria of ANSI/ASME B31.3

Maximum Inlet Pressure

500 psig / 34.5 bar

Outlet Pressure Ranges

0-20, 0-50, 0-100, 0-150, 0-250 psig
0-1.4, 0-3.4, 0-6.9, 0-10.3, 0-17.2 bar

Design Proof Pressure

150% of rated inlet

Leakage

Bubble-tight

Ambient Operating Temperature

-4°F to 165°F / -20°C to 74°C

Flow Capacity

$C_v = 5.0$

MEDIA CONTACT MATERIALS

Body, Back-cap

316 Stainless Steel or Brass

Bonnet

303 Stainless Steel or Brass

Diaphragm

Ethylene Propylene (E.P.) or Nylon Reinforced, Gylon® (PTFE)

Seat

Main Valve: Buna-N, E.P., Chemraz®, Viton®

Vent: CTFE, Vespel®

O-Rings

Buna-N, E.P., Chemraz®, Viton®

Remaining Parts

300 Series Stainless Steel, Nitronic 60

OTHER

Cleaning

CGA 4.1 and ASTM G93

Weight

Stainless Steel: 15 lbs / 6.8 kg

Brass: 16 lbs / 7.3 kg

Vespel® and Viton® are registered trademarks of E.I. du Pont de Nemours and Company.

Gylon® is a registered trademark of Garlock, Inc.

Chemraz® is a registered trademark of Greentweed.



DOME LOADED

SPRING LOADED

TESCOM DH-Series single-stage regulator provides a compact size with high flow capability from 5-200 SCFM / 142-5663 SLPM. The large diaphragm and balanced main valve design provide low droop (larger usable flow range) than competitive designs. Available in spring or dome loaded configurations.

Applications


- Purging, blanketing, high flow inerting, heat treating, and shielding gases
- Performs well at very low pressure differentials such as dewar-supplied processes
- Multi-drop breathing air stations

Features and Benefits


- Available in 316 Stainless Steel or Brass
- Accurately regulates pressure up to 250 psig / 17.2 bar for spring load, 300 psig / 20.7 bar for dome load and 500 psig / 34.5 bar for air load (optional)
- Five outlet pressure ranges
- Choice of spring load or dome load (air load is optional)
- Low droop
- Panel mounting is available

DH Series Regulator Drawings

SPRING LOAD (VENTING)

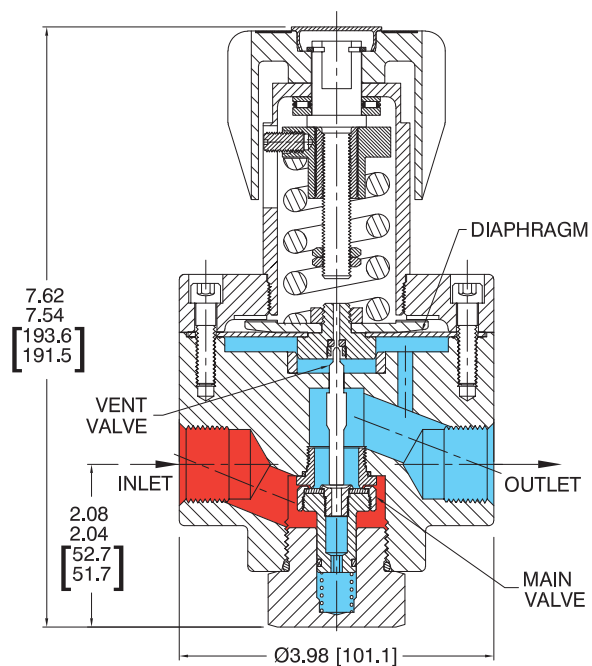



DOME LOAD (NON-VENTING SHOWN, VENTING AVAILABLE)

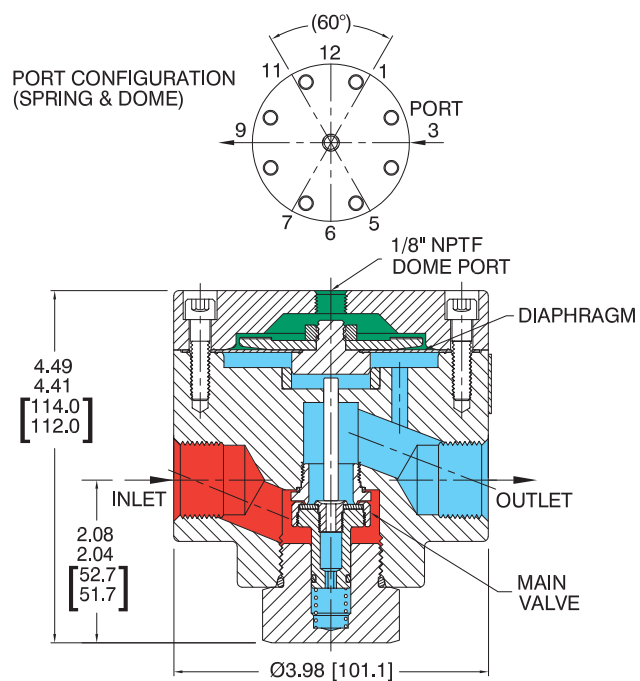

All dimensions are reference & nominal
Metric [millimeter] equivalents are in brackets

DH Series Regulator Flow Charts

For more information on how to read flow curves, please refer to the Flow Curves and Calculations document (debul2007x012) in the TESCOM catalog or on www.tescom.com.

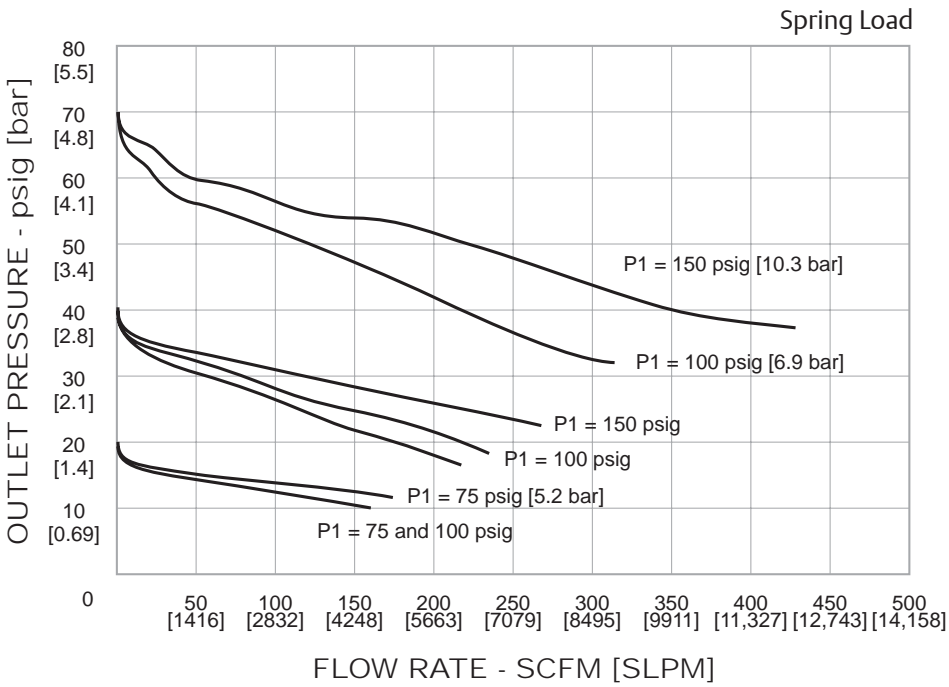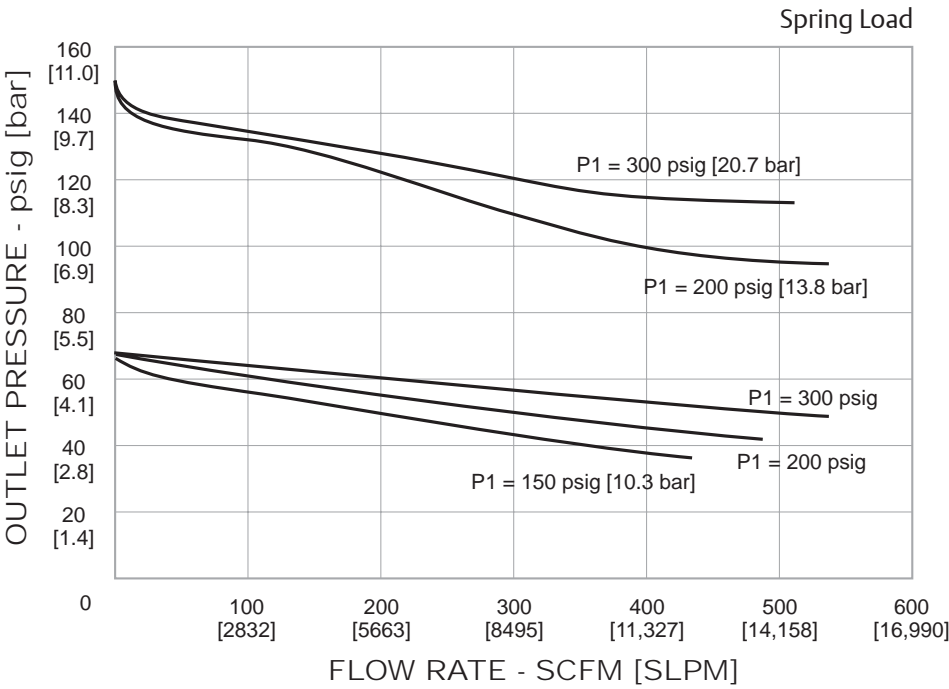





DH Series Regulator Part Number Selector



Learn more about common options.

For modifications, repair kits and accessories, contact factory.

Example for selecting a part number:

Example for selecting a part number:										INLET	OUTLET	GAUGE
DH	H	1	0	B	E	V	9	A	4	4	9	
BASIC SERIES	LOAD TYPE	BODY, BONNET, BACK-CAP MATERIAL	OUTLET PRESSURE	O-RING AND VALVE SEAT MATERIAL	DIAPHRAGM MATERIAL	VENT SEAT MATERIAL	OPTIONAL ITEMS	PORTING CONFIGURATION	INLET, OUTLET, GAUGE PORTS			
DH	H – Spring Loaded, Handknob W – Spring Loaded, Wrench D – Dome Loaded (available with Gylon® diaphragm only)	1 – Brass 6 – 316 Stainless Steel	0 – 0-20 psig 0-1.4 bar 1 – 0-50 psig 0-3.4 bar 2 – 0-100 psig 0-6.9 bar 3 – 0-150 psig 0-10.3 bar 5 – 0-250 psig 0-17.2 bar D – 0-300 psig 0-20.7 bar (Dome Load only)	B – Buna-N O-Ring Buna-N 90 Seat E – E.P. O-Ring E.P. 80 Seat M – Chemraz® O-Ring, Chemraz® 75 Seat V – Viton®	E – E.P. Nylon Reinforced G – Gylon®	C – CTFE V – Vespel® P – Peek N – Non-Venting	C – CCL 9 – None	A – No gauge ports  B – 2 gauge ports at 60°  D – 1 outlet gauge at 90°  L – 2 gauge ports at 90° 	H – 1/2" NPTF* C _V = 3.5 3 – 3/4" NPTF 4 – 1" NPTF 9 – None F – 1/4" NPTF (for gauge only) Y – 1/4" HPIC (for gauge only)			
									* Crossholes for 1/2" ports limits C _V to 3.5			

**WARNING!** Do not attempt to select, install, use or maintain this product until you have read and fully understood the *TESCOM Safety, Installation and Operation Precautions*.

DDHXX1910X012 © 2014, 2017 Emerson Process Management Regulator Technologies, Inc. All rights reserved. 08/2017.
 Tescom, Emerson Process Management, and the Emerson Process Management design are marks of one of the Emerson Process Management group of companies. All other marks are the property of their respective owners.

